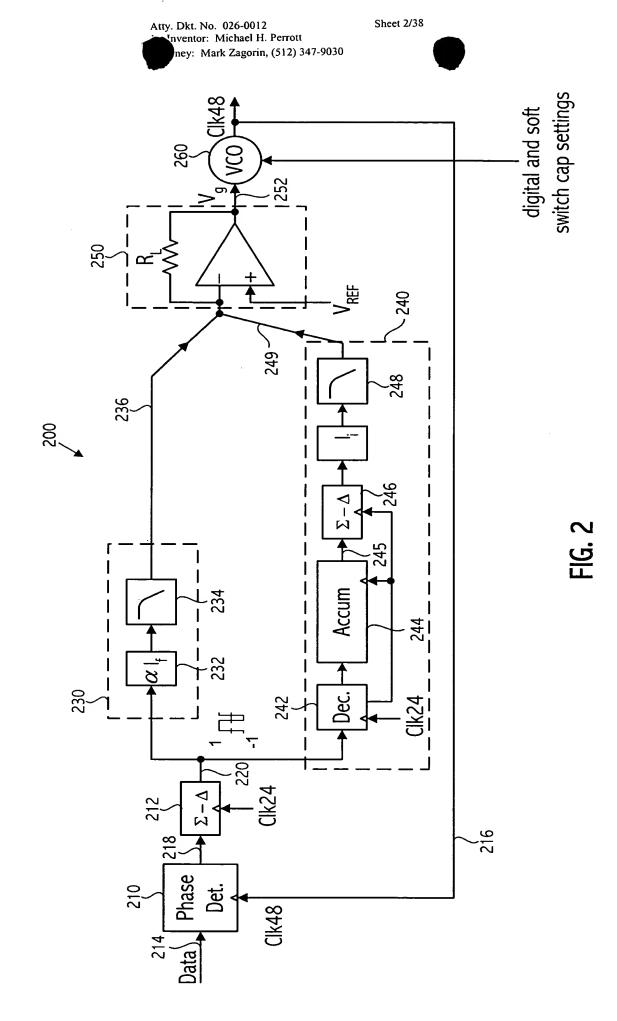


FIG. 1



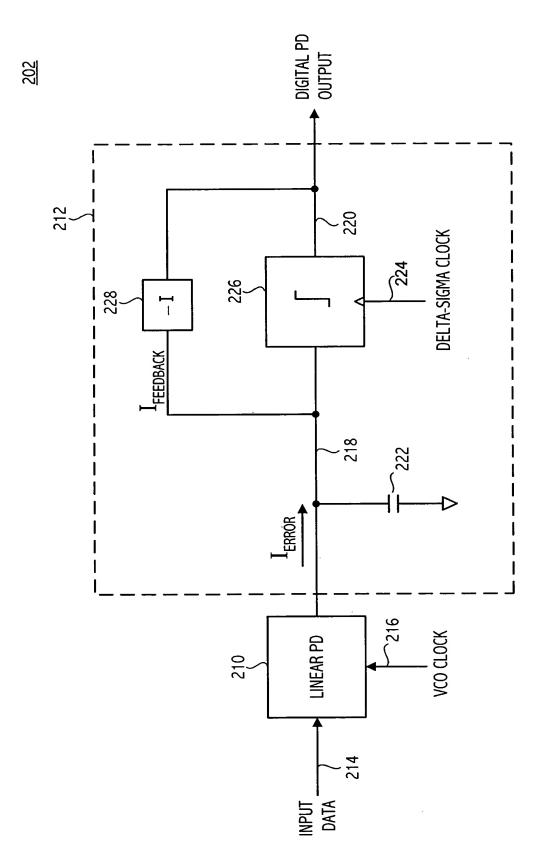


FIG. 3

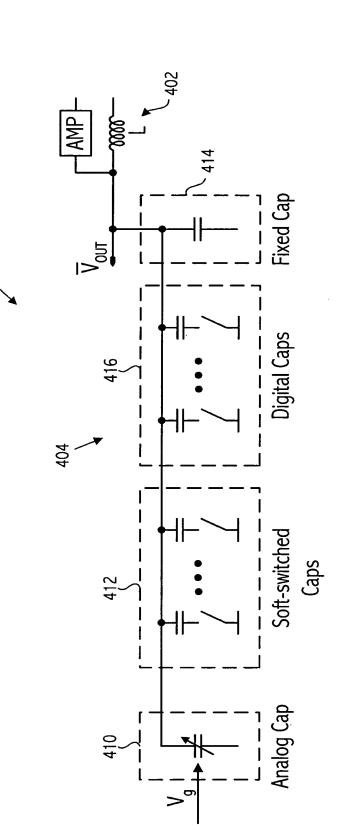
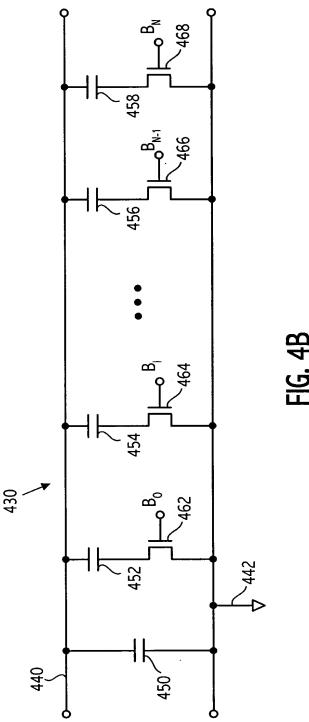
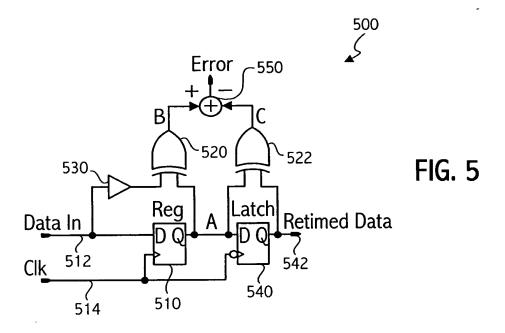


FIG. 4/








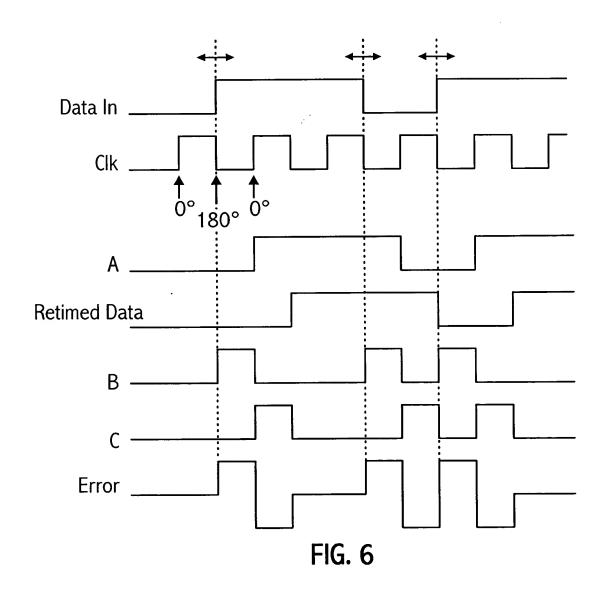


FIG. 8



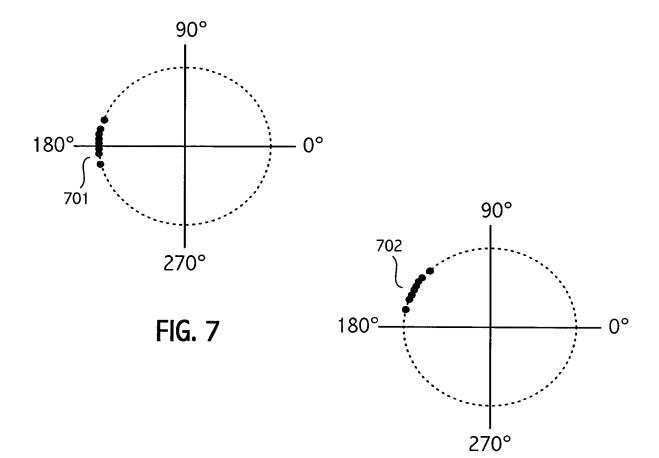

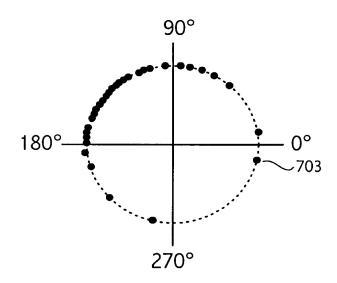

D98555.CEBUL

FIG. 9

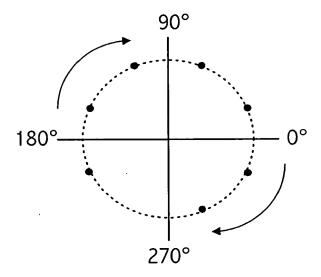


FIG. 10

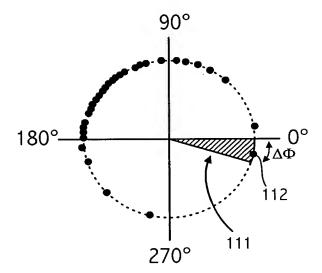


FIG. 11

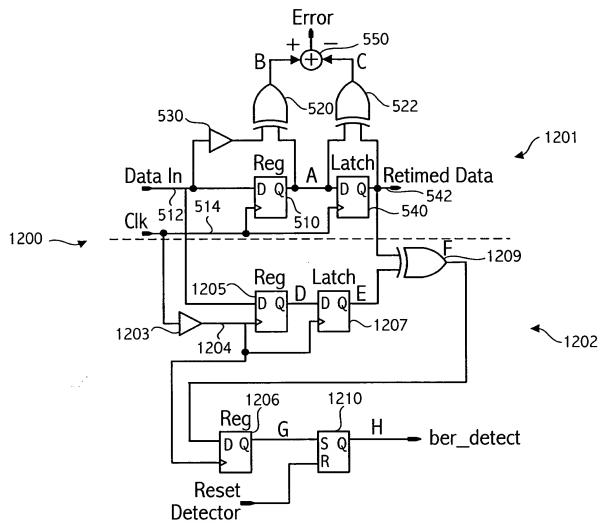


FIG. 12A

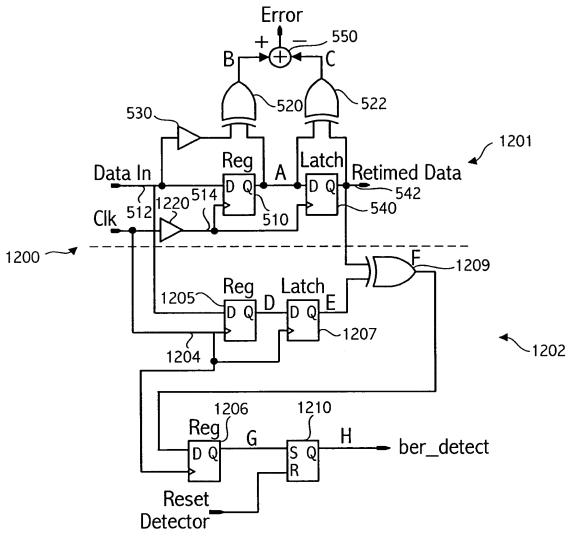
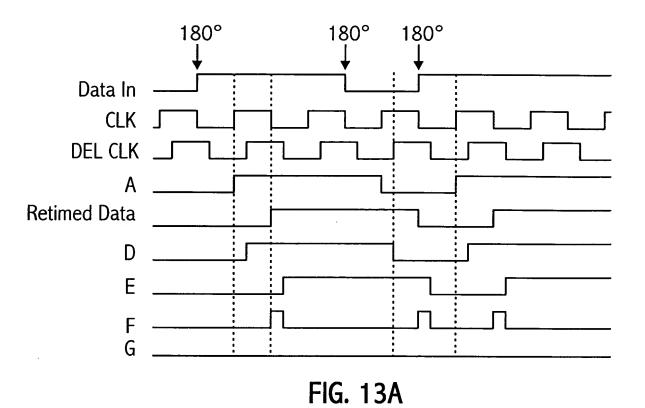


FIG. 12B



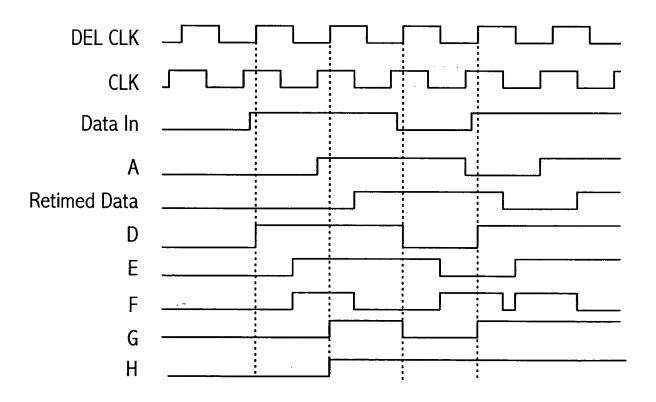


FIG. 13B






FIG. 14

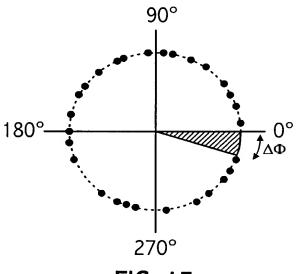


FIG. 15

O98865 CEEGL

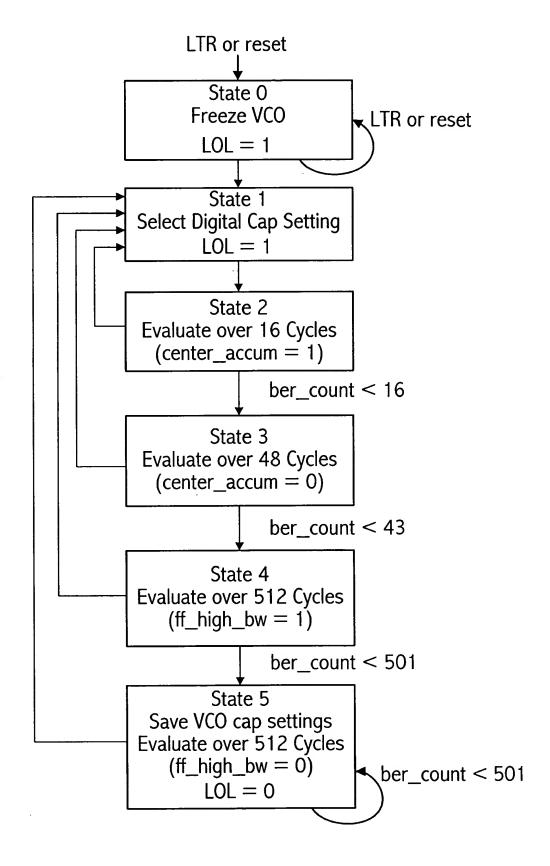


FIG. 16



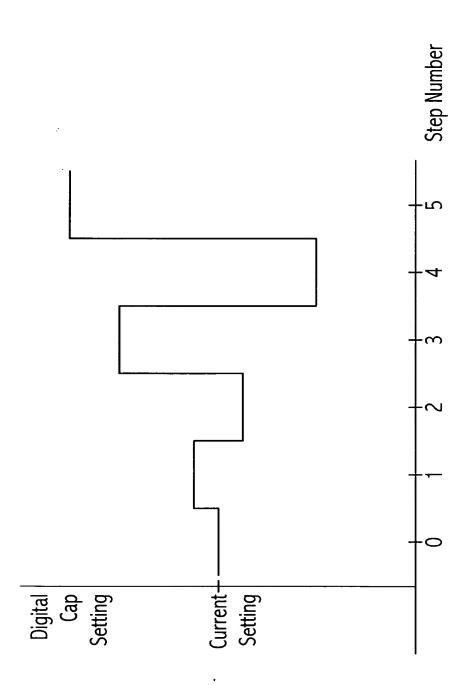


FIG. 17



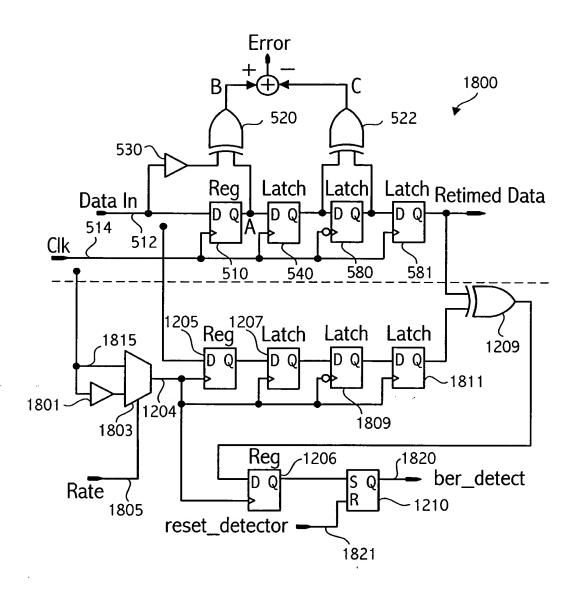


FIG. 18

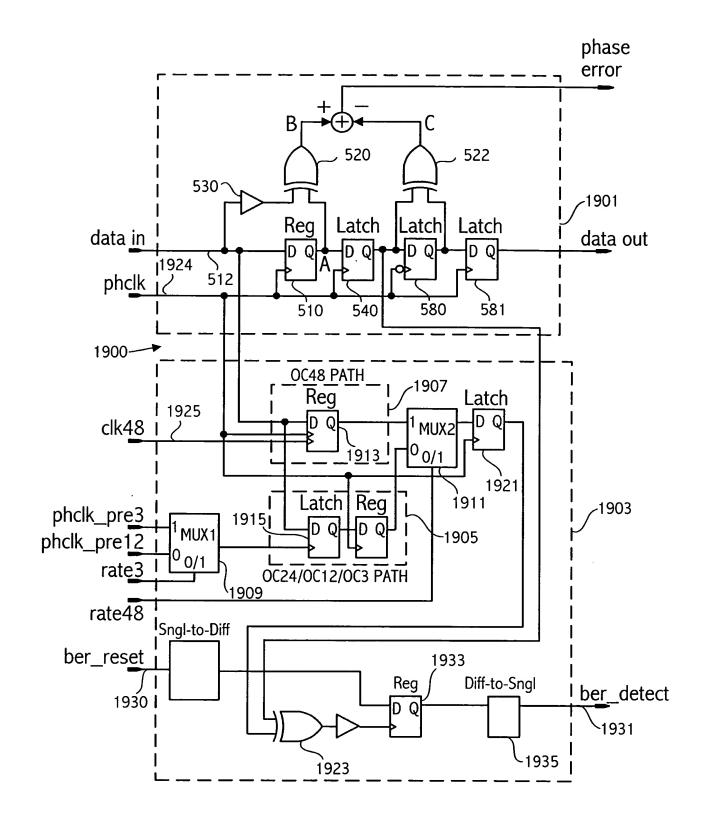


FIG. 19

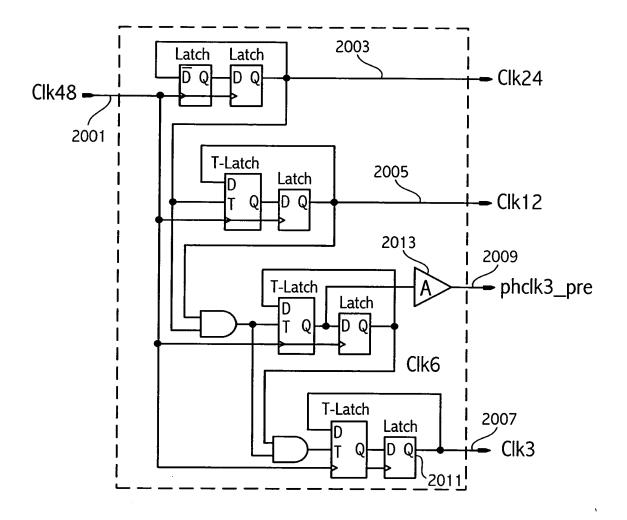


FIG. 20

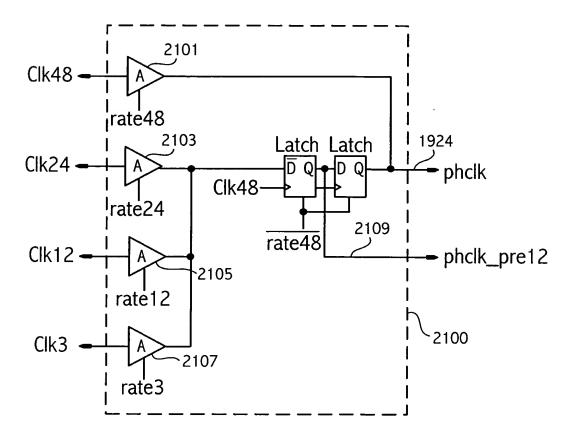


FIG. 21

Atty. Dkt. No. 026-0012 1st Inventor: Michael H. Perrott

Attorney: Mark Zagorin, (512) 347-9030

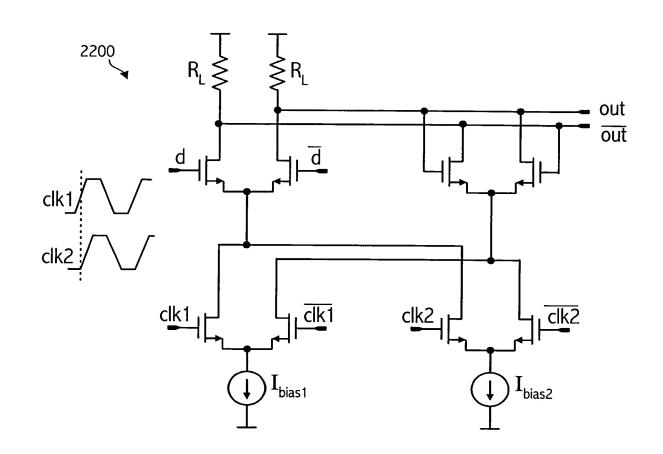
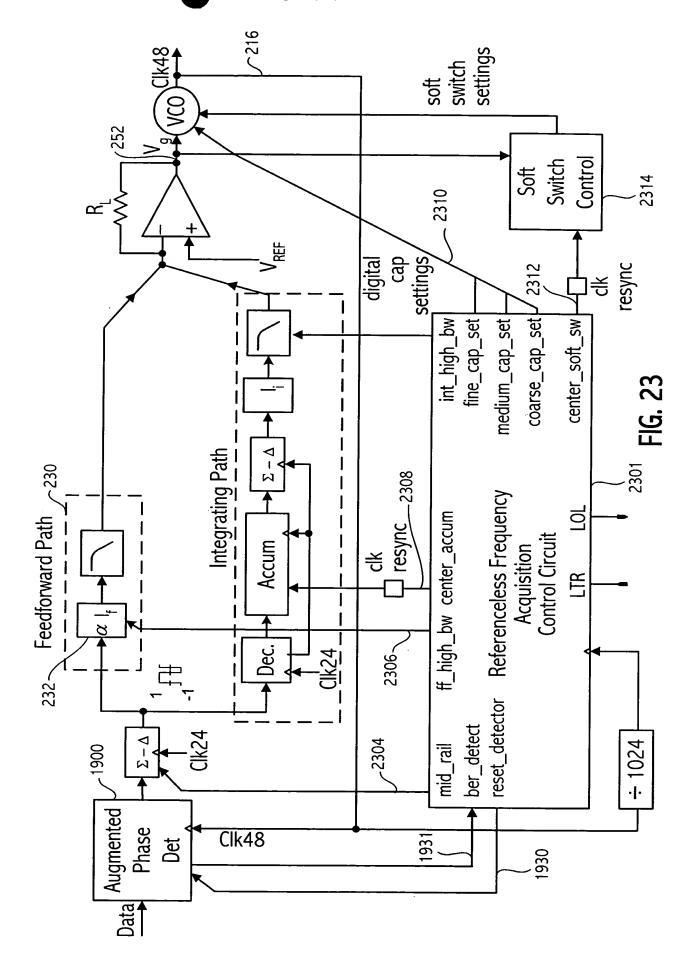
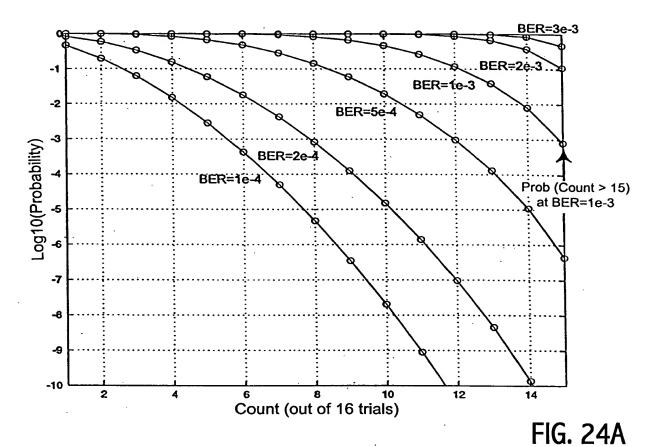


FIG. 22





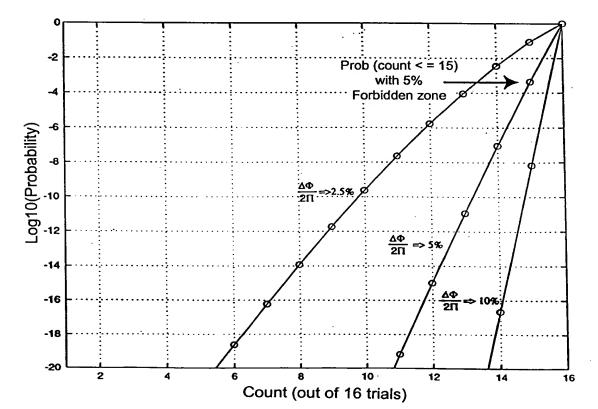


FIG. 24B

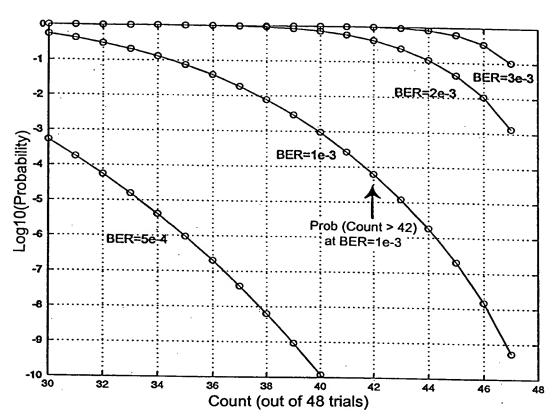


FIG. 25A



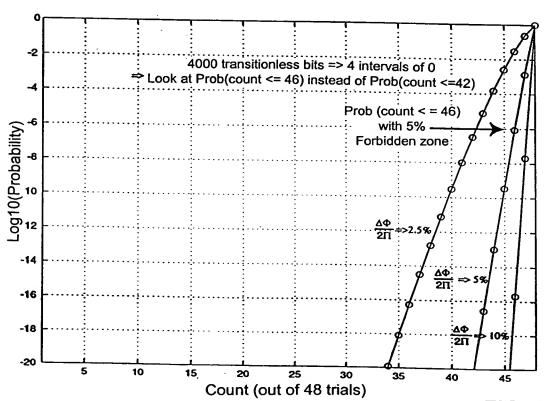


FIG. 25B

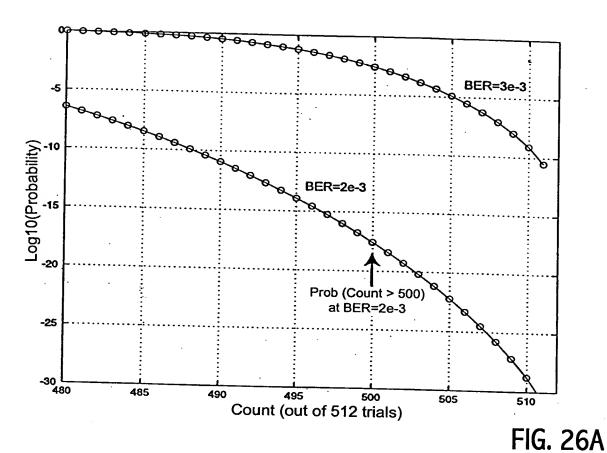

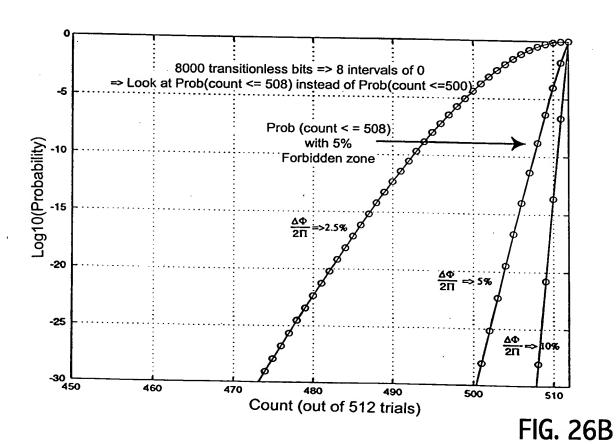

BER Counter	Digital Value				
> 470	31				
400-469	30				
335-399	29				
280-334	28				
230-279	27				
180-229	26				
135-179	25				
95-134	24				
64-94	23				
46-63	22				
33-45	21				
22-32	20	20			
16-21	19				
11-15	18				
7-10	17				
5-6	16				
4	15				
3	14				
2	13	C 1	חבם	1 60 % 137 1	
1	USE SUDBER		bBER	Digital Value	
FIC 27A		Col	unter		
FIG. 27A			> 200	12	
	150-199			11	
	100-149			10	
	65-99			9	
	34-64			8	
	18-33			7	
	10-17			6	
	6-9 4-5			5	
				4	
	FIG. 27B		3	3	
			2	2	
				1	

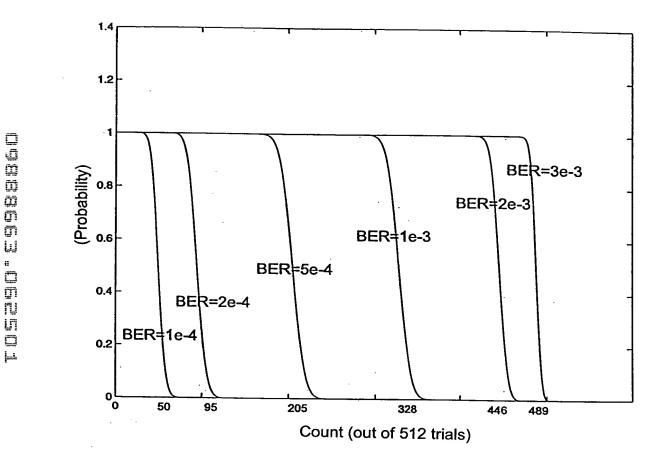


FIG. 28

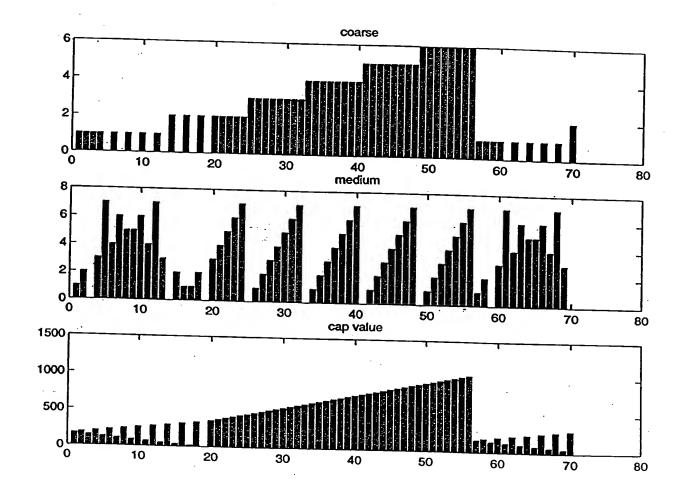


FIG. 29

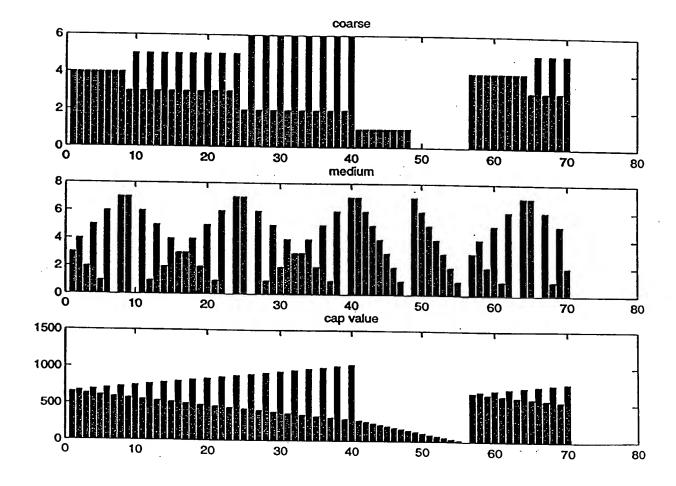


FIG. 30

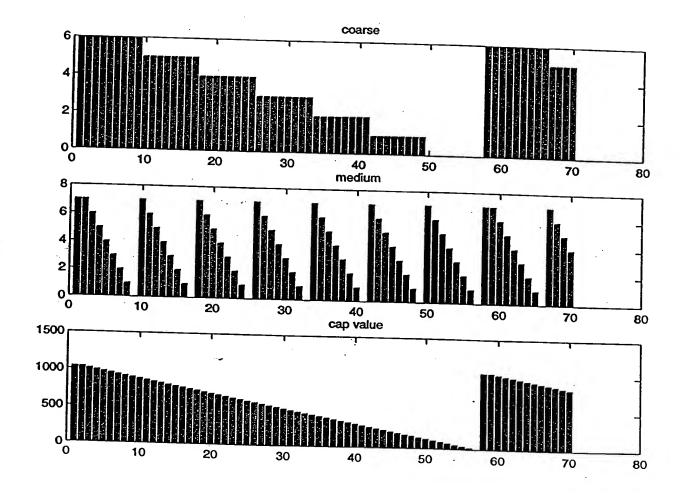


FIG. 31

• Jitter: 0 UI

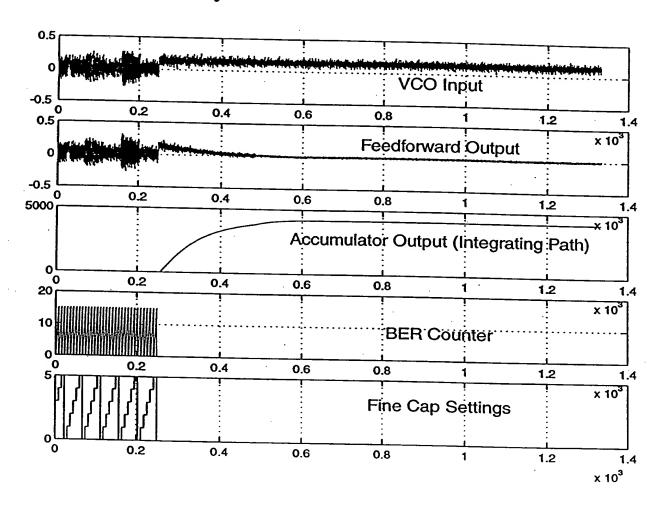


FIG. 32

• Jitter: 5 UI, 100 kHz

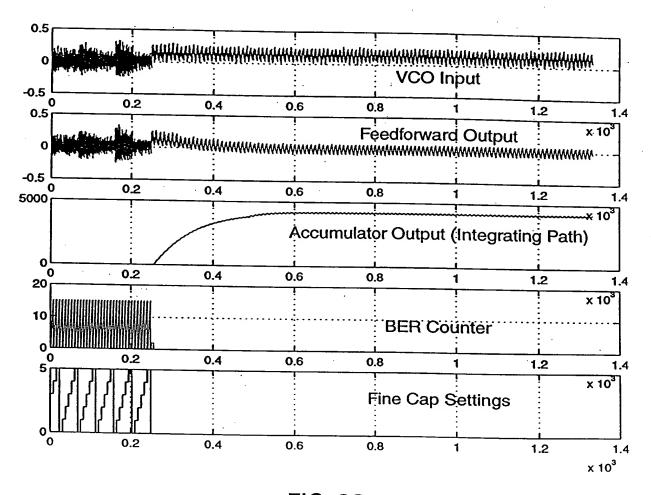


FIG. 33

• Jitter: .5 UI, 5 MHz

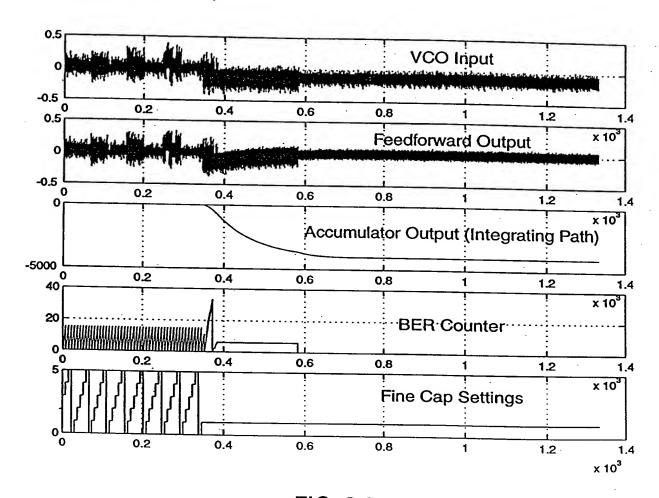


FIG. 34

Ō

IJ

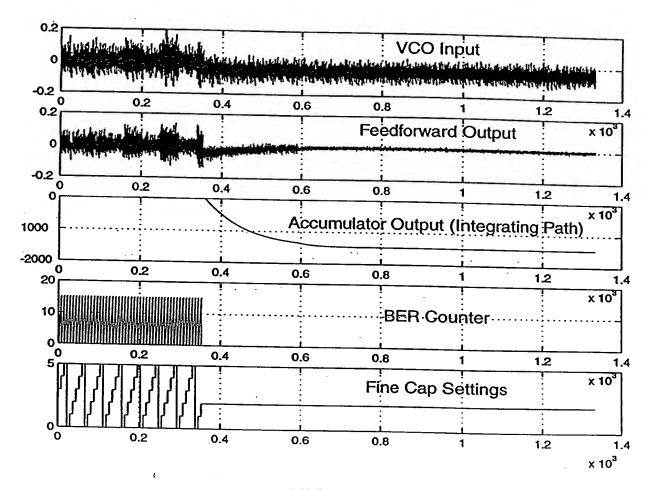


FIG. 35

Comme

• Jitter: 5 UI, 100 kHz

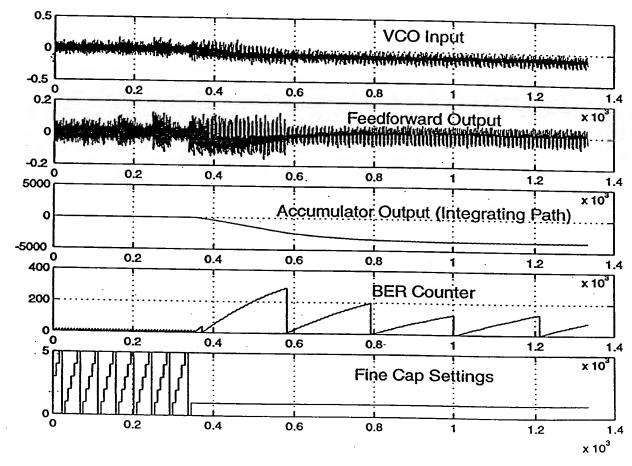


FIG. 36

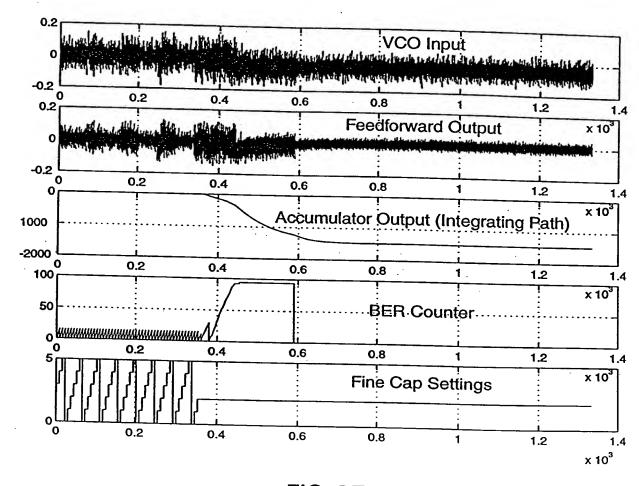


FIG. 37

• Jitter: 0 UI

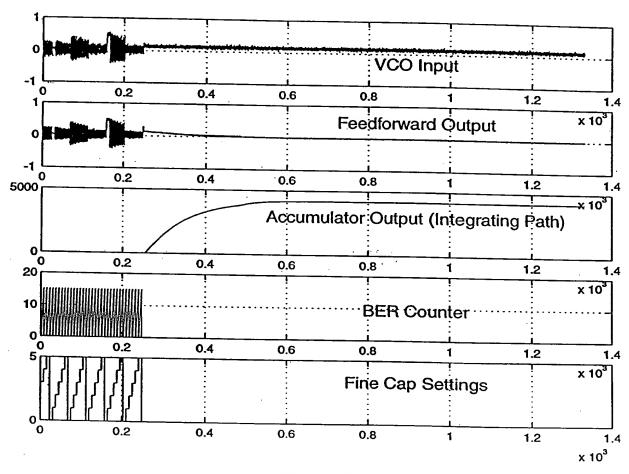


FIG. 38

• Jitter: 5 UI, 100 kHz

• Transition density: 1

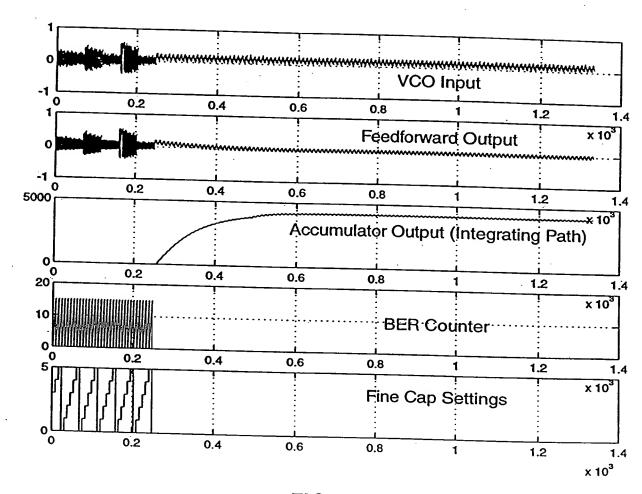


FIG. 39

• Jitter: .5 UI, 5 MHz

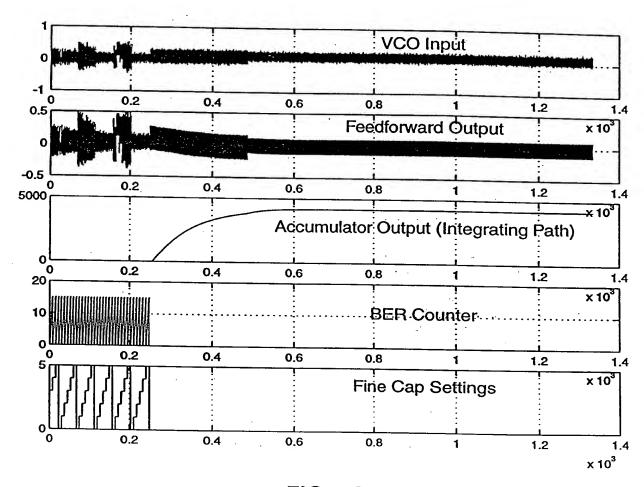


FIG. 40

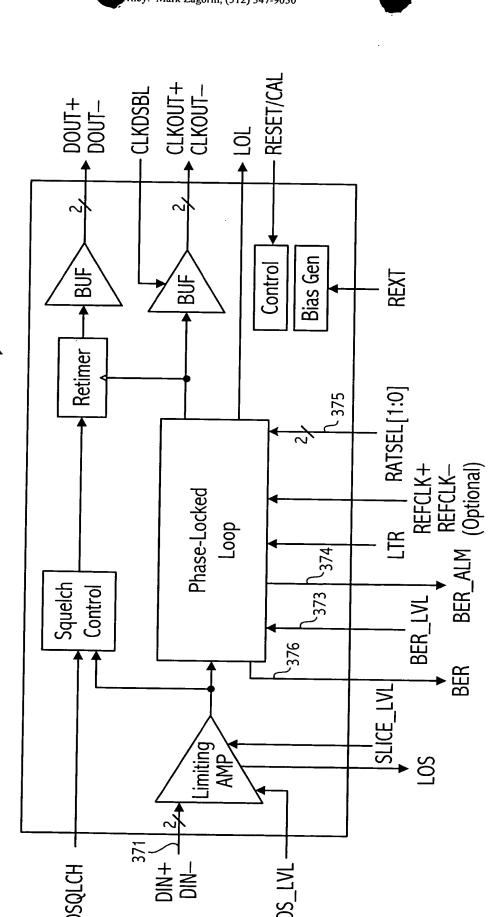


FIG. 41